1721C645

PROMENADE AB BV / PM+dessin AB BV

PRODIS-GUT Certificate

The article mentioned meets the test criteria of Gemeinschaft umweltfreundlicher Teppichboden e.V.

Short description of the textile floor covering

Type of production:	pile carpet acc. EN 1307:2014 - tufted
Type of surface:	cut pile - patterned
	100% PA6
Type of backing:	textile backing - woven - man-made fibres

Harmful substances

The bans on use and thresholds, if applicable, in particular for SVHCs, carriers, azo dyes, allergenic and carcinogenic dyes, heavy metals chlorophenols (e.g. PCP), biocidal substances, phthalates and other softeners, halogenised flame retardants and Sb_20_3 as well as inorganic fibres specified in the GUT criteria have been met.

Formaldehyde

The ban on the use of adjuvants containing or splitting off formaldehyde have been met.
The formaldehyde emissions are < 10 µg/m³.

VOC emissions

Threshold in µg/m³	3 days	28 days
TVOC (C_6-C_{16}):	250	100
VOC without NIK:	100	50
SVOC (C_{16}-C_{23}):	30	30
R-value:	1,0	1
HCHO:	10	4
carcinogenics:	not detectable	
benzene:	not detectable	

The limit values for VOC emissions indicated alongside, determined in accordance with the test chamber process (ISO 16000-6 or EN 10580), have been met. The test was made 3 days, or, where required, 28 days after placement into the chamber.

The evaluation of the emissions and the calculation of the R value were based on the then current LCI list of the AgBB.

Odour

The product has passed the odour test with at least the grade 3.
A slight odour of low intensity is permissible in new merchandise.

Shares of recycled materials

The requirements regarding the content of contaminants and the emission behaviour apply unrestrictedly also to products whose manufacture included the use of recycled materials. The use of recycled raw materials (e.g. pile fibres) must be indicated when the manufacturer registers the article.

For a complete list of all limit values and test criteria see

www.gut-ev.de

Aachen, 23.05.2016

GUT security code

This certificate was issued electronically and requires no further signature

Gemeinschaft umweltfreundlicher Teppichboden e.V.,
D-52068 Aachen, Schönebergstrasse 2

PRODIS

THE COMPREHENSIVE EUROPEAN PRODUCT INFORMATION SYSTEM FOR TEXTILE FLOORCOVERINGS

GUT Product Test
Criteria and limit values

The GUT Signet can be granted only to members of Gemeinschaft umwelt-freundlicher Teppichboden e.V.
(Only manufacturers of textile floorcoverings can become members)

The use of the substances listed below is either forbidden or GUT has specified limit values for the substances that must not be exceeded.

ORGANIC CARRIERS (DYEING ACCELERANTS)
GUT test procedure No. 1

There is a ban on the use of the carriers listed.

Di-, tri-, tetra-, penta- and hexachlorobenzenes; di-, tri-, tetra- and pentachlorotoluenes

AZODYES
GUT test procedure No. 2

There is a ban on the use of dyes and pigments which, under reductive conditions, release carcinogenic amines.

4-aminodiphenyl, benzidine, 4-chloro-o-toluidine, 2-naphthylamine, o-amino-azotoluene, 2-amino-4-nitrotoluene, p-chloroaniline, 2,4-diaminoanisol, 4,4'-diaminodiphenylmethane, 3,3'-dichlorobenzidine, 3,3'-dimethoxybenzidine, 3,3'-dimethylbenzidine, 3,3'-dimethyl-4,4'-diaminodiphenylmethane, p-cresidine, 4,4'-methylene-bis-(2-chloro-aniline), 4,4'-oxydianiline, 4,4'-thiodianiline, o-toluidine, 2,4-diaminotoluene, 2,4,5-trimethylaniline, o-anisidine, p-amino-azobenzene*, 2,4-xylidine, 2,6-xylidine, 6-amino-2-ethoxynaphthaline**, 4-amino-3-fluorophenol**
(*not identifiable, **special procedure required)

DISPERSE DYES
GUT test procedure No. 3

There is a ban on the use of the dyes listed, which are classified as "allergising".

C.I. Disperse Blue 1, -3, -7, -26, -35, -102, -106 and -124, C.I. Disperse Orange 1, -3, -37/76, C.I. Disperse Red 1, -11 and -17, C.I. Disperse Yellow 1, -3, -9, -39 and -49

CARCINOGENIC DYES
GUT test procedure No. 4

There is a ban on the use of the dyes listed, which are classified as "carcinogenic".

C.I. Acid Red 26, C.I. Basic Red 9, C.I. Direct Red 28, C.I. Direct Blue 6, C.I. Disperse Blue 1, C.I. Disperse Yellow 3, C.I. Direct Black 38

HEAVY METALS
GUT test procedure No. 5

Dyes and pigments containing the listed heavy metals as ingredients of the dyeing component must not be used to dye the pile material. The limit value for the total heavy metal content of a fitted carpet is 100 mg/kg.

Pb (lead), Cd (cadmium), Hg (mercury), Cr (chromium total) or Cr(VI)

FLAME RETARDANTS
GUT test procedure No. 6

There is a ban on the use of the halogenous and phosphorous flame retardants listed.

PBB, TRIS, TEPA, SCCPs, PeBDE (pentabromodiphenylether)

ACTIVE BIOCIDAL SUBSTANCES — GUT test procedure No. 7

For the biocides listed that may be contained as active substances in respective formulations there is either a ban on their use or a limit value was specified for the respective active substance or group of active substances.

1) There is a ban on the use of products containing **TBT**.
2) The limit value for the **chlorophenols**, pentachlorophenol and tetrachlorophenol (PCP and TeCP), is 0.1 mg/kg.
3) For **orthophenylphenol** (OPP), there is a limit value of 1 mg/kg.
4) For the **chlororganic pesticides** listed, there is a limit value of 0.04 mg/kg for each individual substance and of 1 mg/kg for the sum of all components, respectively.
   o,p' and p,p' –DDE, –DDD and –DDT, α, β, δ, ε-hexachlorocyclohexane, aldrine, dieldrine, endrine, heptachlor, heptachloroepoxide, hexachlorobenzene, lindane, methoxychlor, mirex, toxaphene, *·α-and ,β-endosulphane
5) For the **phosphororganic pesticides** listed, there is a limit value of 0.04 mg/kg for each individual substance and of 1 mg/kg for the sum of all components, respectively.
   Diazinon, dichlorofenthion, dichlorophos**, malathion**, parathion-ethyl, parathion-methyl*, trifluralin (*special procedures required, **other identification limits).
6) For the **herbicides**, 2,4,5-T and 2,4-D, there is a limit value of 0.04 mg/kg for each individual substance and of 1 mg/kg for the sum of all components, respectively.
7) Except for permethrine, there is a ban on the use of all **pyrethroids** for the protection of wool against moths and beetles.
8) As moth- and beetle-proofing agent for the sole finishing of woollen fitted carpets, **permethrine** may be used up to a maximum limit of 210 mg/kg. Application must be conducted in compliance with a prescribed procedure.

EMISSIONS FROM TEXTILE FLOORCOVERINGS — GUT test procedure No. 8

Volatile organic components from textile floorcoverings are determined in compliance with the test-chamber process. The following limit values are specified for the components listed.

TVOC	300 $\mu g/m^3$	Test chamber method (EN 13419; 1+2; ISO 16000). The test is performed 72h after t = 0. For calculation and evaluation of the R-value, the actual LCI-Value List as published by AgBB* is used.
VOC without LCI	100 $\mu g/m^3$	
R-Value	≤ 1	
SVOC (C_{16} to C_{22})	30 $\mu g/m^3$	
Cancerogenic Substances (EU-list Class 1 a. 2)	n.n.	

* Ausschuss zur gesundheitlichen Bewertung von Baumaterialien

ODOUR — GUT test procedure No. 9

The material tested should only have the low-intensity odour typical of a new product.

The test mark following appraisal by a team of 7 persons must be a value < 4.

REQUIREMENTS ON LATICES — GUT test procedure No. 10

The latices used for coating must meet the following requirements on the residual monomer content.

For the individual substances styrene and 4-PCH, the limit value is 200 mg/kg of latex, and for ethylbenzene and 4-VCH, the limit value for each is 50 mg/kg of latex.
The limit value of the sum for all 4 components is 400 mg/kg of latex.
For the manufacture of foam coatings, there is a ban on the use of the vulcanisation accelerator Zn-diethyldithio-carbamate (ZDEC).

©GUT 2004-B

DECLARATION OF PERFORMANCE

DOP: 1011#IE0ABV

1. Unique identification code of the product-type:

   1011#IE0ABV

2. Type, batch or serial number or any other element allowing identification of the construction product as required pursuant to Article 11(4):

   PROMENADE AB BV / PM+dessin AB BV - Textile floor covering - pile carpet acc. EN 1307:2014

3. Intended use or uses of the construction product, in accordance with the applicable harmonised technical specifi- cation, as foreseen by the manufacturer:

   For use as floor covering in buildings (see EN 14041) according to the manufacturer's specifications.

4. Name, registered trade name or registered trade mark and contact address of the manufacturer as required pursuant to Article 11(5):

   Balta Industries NV/Division ITC - Kanegemstraat 15 - B - 8700 Tielt

5. Where applicable, name and contact address of the authorised representative whose mandate covers the tasks specified in Article 12(2):

   - - -

6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V:

   System 3

7. In case of the declaration of performance concerning a construction product covered by a harmonised standard: Name of the notified test laboratory, that has issued the certificate of conformity of the factory production control, inspection reports and calculation reports (if relevant).

   CRET; Centre de recherches et d'etudes techniques du tapis Rue du vert bois, Zone industrielle, P.O. Box 30 F - 59531 Neuville-en-Ferrain Cedex
   Notified Body

   2015/032
   certificate of constancy of performance

8. In case of the declaration of performance concerning a construction product for which a European Technical Assessment has been issued:

   not applicable

9. Declared performance

Essential characteristics	Performance	Harmonised technical specification
Reaction to fire	B_{fl}-s1	EN 14041:2008-05
Content of Pentachlorophenol	DL PCP	EN 14041:2008-05
Formaldehyd Emissions	NA HCHO	EN 14041:2008-05
Slip resistance	DS	EN 14041:2008-05
Electrical behavior (dissipative)	NPD	EN 14041:2008-05
Electrical behavior (conductive)	NPD	EN 14041:2008-05
Electrical behavior (antistatic)		EN 14041:2008-05
Thermal conductivity [W/mK]	0.043	EN 14041:2008-05
Water-tightness	NPD	EN 14041:2008-05

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4 Signed for and on behalf of the manufacturer by:

    Luc Nelis, Production Manager
    (name and function)

    19.09.2016, Tielt
    (place and date of issue)

    (signature)

cret
Centre de Recherches et d'Etudes Techniques du Tapis

REACTION TO FIRE CLASSIFICATION REPORT
N° 2015/032-2

(English report of classification report RC 2015/032-1)

According to EN 13501-1 (2007) + A1 (2013)

Notification by the French Government to the European Commission under n° NB 2401 Regulation (UE) n° 305/2011

Sponsor :	BALTA INDUSTRIES N.V / DIVISION I.T.C Kanegemstraat 15 B 8700 TIELT BELGIUM
Product name :	Products group:Tufted carpet 100 % polyamide on woven textile backing. (Updated)
Description :	Textile floor coverings (EN 1307 family) (see detailed description in paragraph 2)
Date of issue :	16/06/2016

The indicated classification does not prejudge the conformity of marketed materials with the samples submitted to the tests and under no circumstances, this document should not be considered as type approval or certification of the product in the sense of the L 115-27 article of the consumption's code of the law dated June 3rd 1994.

The reproduction of this classification report is only authorised in its integral form.
It comprise 4 pages

1. Introduction

This classification report defines the classification assigned to the above-mentioned product (s) in accordance with the procedures given in the NF EN 13501-1 standard: September 2007 & A1 (2013).

2. Details of classified product

2.1. Product standard
NF EN 14041 (2005): " Resilient, textile and laminate floor coverings - Essential characteristics".

2.2. Product description
Tufted carpet 100% polyamide on woven textile backing (EN 1307 family).

Tested glued over a fibre-cement board classified $A1_{fl}$ or $A2_{fl}$ with a density (1800 ± 200) kg/m^3 and thickness (8 ± 2) mm

Use surface: 100 % polyamide.
Nominal mass per unit area : 1530 to 2280 g/m².
Nominal effective pile thickness : 2,4 to 5,9 mm.

3. Test reports and tests results in support of this classification

3.1. Tests reports

Name of laboratory	Name of sponsor	Test report N°	Test method
C.R.E.T.	BALTA INDUSTRIES N.V / DIVISION I.T.C Kanegemstraat 15 B 8700 TIELT BELGIUM	RL 2015/296 (29/05/2015) + classification report 2015/041 (29/05/2015)	NF EN ISO 9239-1

Name of laboratory	Name of sponsor	Test report N°	Test method
C.R.E.T	BALTA INDUSTRIES N.V / DIVISION I.T.C Kanegemstraat 15 B 8700 TIELT BELGIUM	RL 2015/124 (20/03/2015) + classification report 2015/015 (20/03/2015)	NF EN ISO 9239-1

3.2. Tests results

Classes of reaction to fire for textile floor coverings, classified without further testing.

Test method	The floorings « **MASTER AB / MAESTRO AB** » & « **PROVIDER AB** » meet the requirements of table 2 of the standard EN 14041 and are classified without further testing (CWFT)
NF EN ISO 11925-2	**Classification E_{fl}**

				Results
Test method	Product	Number of tests	Parameters	Continuous parameters : mean value
NF EN ISO 9239-1	MASTER AB / MAESTRO AB (classification report CRET 2015/041)	3	Critical heat flux (kW/m²)	≥ 8,0
			Smoke (% X min)	≤ 750

				Results
Test method	Product	Number of tests	Parameters	Continuous parameters : mean value
NF EN ISO 9239-1	PROVIDER AB (classification report CRET 2015/015)	3	Critical heat flux (kW/m²)	≥ 8,0
			Smoke (% X min)	≤ 750

4. Classification and field of application

4.1. Reference of classification

This classification has been carried out in accordance with EN 13501-1 :2007 & A1 (2013).

4.2. Classification

Fire behaviour		Smoke production
B_{fl}	-	s1

Classification : B_{fl} – s1

4.3. Field of application

This classification is valid for the following end use applications :

Glued over fibre-cement $A2_{fl}$ or $A1_{fl}$ class with a density ≥ 1350 kg/m^3.

This classification is valid for the following product parameters :

- A nominal mass per unit area of: 1530 to 2280 g/m²
- A nominal effective thickness of : 2,4 to 5,9 mm

The classification of the product family is valid for the following trademarks :

BLITZ AB
CHAMBORD AB
DIAMANTO AB / DM + DESSIN AB
MASTER AB / MAESTRO AB
PROGRESSA AB / PG + DESSIN AB
PROJECTA AB / PJ + DESSIN AB
PROMENADE AB / PM + DESSIN AB

PROMINENT AB
PROSPECTA NEW AB / PP + DESSIN AB
PROVIDER AB / PV + DESSIN AB
ROBINO AB / RB + DESSIN AB

5. Limitations

This classification document does not represent type approval or certification of the product.

"The classification assigned to the product in this report is appropriate to a declaration of conformity by the manufacturer within the context of system 3 attestation of conformity and CE marking under the Construction Products Directive.

The manufacturer has made a declaration, which is held on file. This confirms that the products design requires no specific processes, procedures or stages (no addition of flame-retardants, limitation of organic content, or addition of fillers) that are aimed at enhancing the fire performance in order to obtain the classification achieved. As a consequence the manufacturer has concluded that system 3 attestation is appropriate.

The test laboratory has, therefore, played no part in sampling the product for the test, although it holds appropriate references, supplied by the manufacturer, to provide for traceability of the samples tested."

Head of Tests
David VANDIERDONCK

For the SARL C.R.E.T.
The Technical Director
Marc WELCOMME

End of the classification report

Test results	Enclosure TS

Impact sound insulation of ISO 140-8 : 1998 - 03

Measurement of impact sound insulation by a floor covering - on a solid strings-floor

Customer: **CENTEXBEL**

Tested material: **PROMENADE AB**
Test rooms: 02 u. K2, Hauptstraße 133, 52 477 Alsdorf
Test area: 4,24 m x 4,15 m Test area of slab
Date of test: 14.05.2010

Description of the test material:

Total thickness: **- mm**


Mass / area: **- kg/m²**

laid loose on a 140 mm thick reinforced concrete floor slab

Receiving room:
Volume: 58,9 m³
Temperature: 20 °C
Humidity: 65 %

The results are based on tests, which were effected with on artificial source of sound by labratory conditions.

Frequency	Ln Bare floor	ΔL
Hz	dB	dB
50		1,2
63		2,3
80		2,3
100	61,0	2,5
125	61,4	4,4
160	64,8	5,3
200	63,7	8,6
250	65,4	10,4
315	65,6	12,3
400	66,1	16,5
500	66,0	19,9
630	66,4	27,1
800	66,3	31,4
1000	66,2	39,8
1250	66,6	43,0
1600	67,2	46,9
2000	67,1	49,1
2500	67,0	53,2
3150	66,4	---
4000		---
5000		---

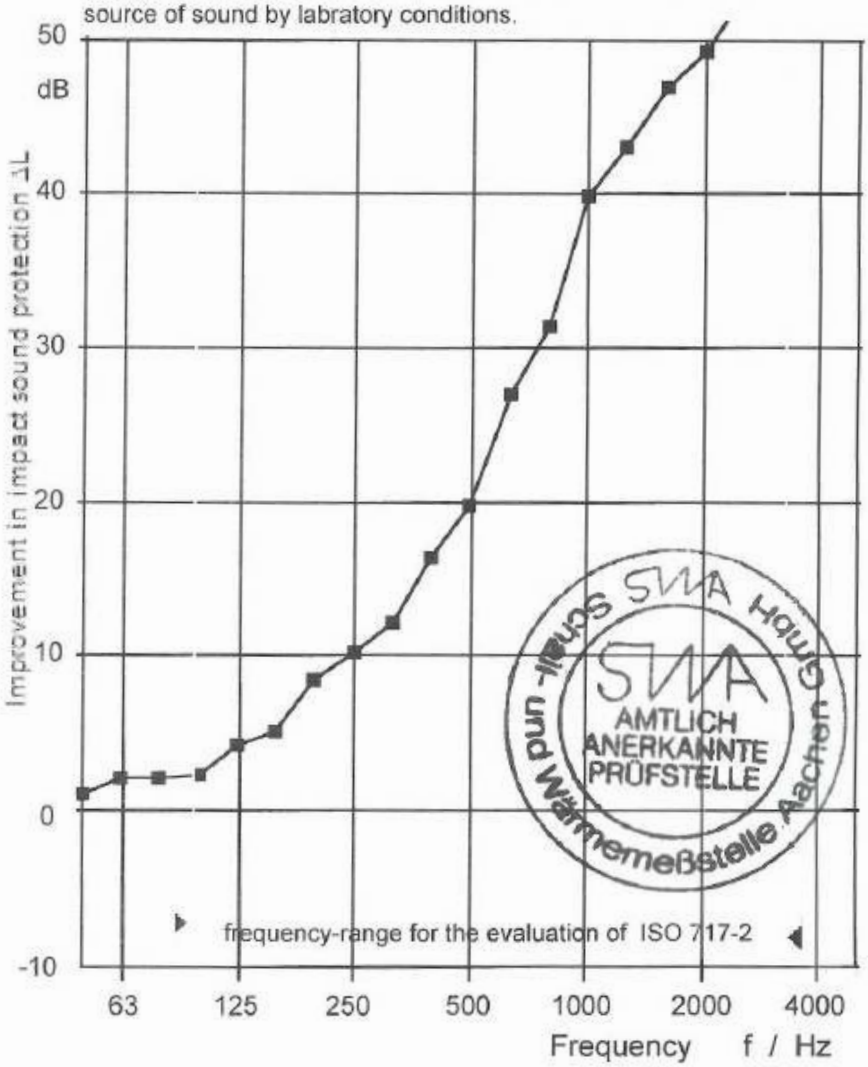

Reception filter: third-octave
Calculation according ISO 717-2:

Impact sound improvement index	non rated reduction of impact sound insulation	
ΔL_W = **24 dB**	$\Delta L_{lin} = \Delta L_W + C_{I,\Delta}$	$C_{I,\Delta}$ = -12 dB
(VM = 24 dB)	ΔL_{lin} = **12 dB**	$C_{I,r}$ = 1 dB
		$C_{I,r,50\text{-}2500}$ = 4 dB

Test report no.: **CT140510D TS**
Aachen 28.05.2010

SWA Schall- und Wärmemeßstelle Aachen GmbH

(Dipl.-Ing. A. Siebel) (Dr.-Ing. L. Siebel)

Soundabsorber for the application in buildings - valuation of sound absorbtion

Sound absorption of DIN EN ISO 11654 : 1997- 07

Customer: **CENTEXBEL**

Tested material: **article:** **PROMENADE AB**

Test room: reverberation room, Hauptstraße 133, 52 477 Alsdorf

Test area: 12,0 m²

Test method: method of reverberation room

Date of test: 14.05.2010

Description of the test material:

Total thickness: - **mm**

Mass / area: - **kg/m²**

laid loose on the floor of the reverberation room

frequency - range of the "shapeindicators"	Frequency in Hz	pactical sound absorption coefficient
	125	0,00
L	250	0,05
M	500	0,10
M	1000	0,25
H	2000	0,45
H	4000	0,45

Results:

Relation - curve:

Reverberation room:

Basic plan: trapezoid


Volume: 211 m³

Temperature: 20 °C

Humidity: 65 %

Surfaces areas of reverberation room: 213 m²

Surfaces areas of reflectors in reverberation room: 54,5 m²

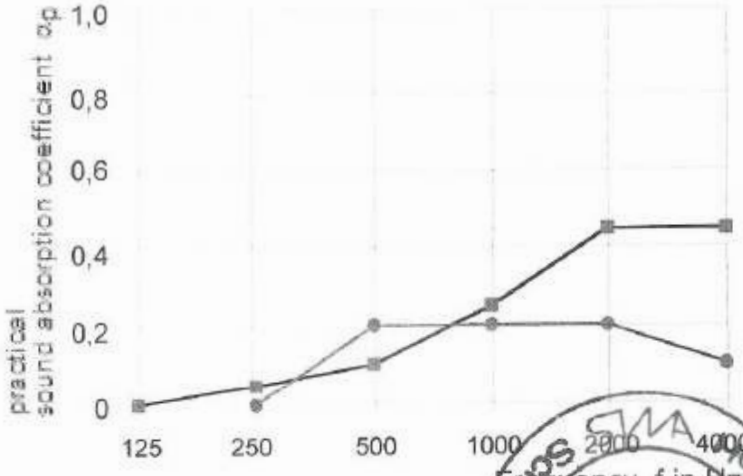

Evaluated sound absorptions grade:

α_W: **0,20 (- - H)** *)

*) It is recommended insistently to use this singular valuation with complete curve of sound absorption garde.

SWA Schall- und Wärmemeßstelle Aachen GmbH
DEUTSCH AKKREDITIERTE PRÜFSTELLE

TÜV NORD

CERTIFICATE

Permission to use the test mark

MATERIAL TEST
– SUITABLE FOR ALLERGIC PEOPLE –

TÜV NORD Systems GmbH & Co. KG, Hamburg (Germany),

hereby confirms that exclusive articles*) of the wall-to-wall-carpet groups

- **Polyamid**
- **Polyamid/Polypropylen**
- **Polypropylen** and
- **Sorona**

conform to the requirements set by TÜV NORD Systems GmbH & Co. KG.

BALTA INDUSTRIES NV, Sint-Baafs-Vijve (Belgium),

is therefore granted the right to use the test mark shown below
in connection with the exclusive articles of the wall-to-wall-carpet groups.

*) see back of the page

TÜV NORD Systems GmbH & Co. KG
Indoor Air Hygiene Product Testing

Vera Gräff

Dipl.-Ing. Vera Gräff

Essen, 20 May 2016

TÜV NORD
TÜV NORD Systems GmbH & Co. KG
Voluntary Material Test According to TÜV NORD Standard
Suitable for Allergic Persons
Wall-to-wall-carpet of allergen-tested material
SEGB-2384/05

The validity of the certificate is regulated in the terms of use of the test mark.

BALTA INDUSTRIES NV, Sint-Baafs-Vijve (Belgium), is granted the right by TÜV NORD Systems, Hamburg (Germany), to use the TÜV NORD Test Mark "Wall-to-wall-carpet of allergen-tested material – Suitable for Allergic People" for the articles of wall-to-wall-carpet groups listed below:

Wall-to-wall-carpet group "Polyamid"

AKTUA UX, AKZENTO TR, ALTONA UX FR, ANGELO UX, APOLLO SDE NEW TR, AREZZO WFB, ARISTOCRAT TR, ARTO TR, AVELINO WFB, BLITZ TR, CAPRICE UX, CARPE DIEM UX, CAVIAR WFB, CELESTE WFB, CHAMBORD TR, CHAMBORD UX, CHIC UX, CORSA TR, CORSA UX, DIVINO WFB, DIVO WFB, DUETTE WFB, DURANA TR, ELITE WFB, EVOLVE TR, EXCLUSIVO WFB, FIGARO NEW UX, FORTESSE SDE NEW TR, FRIVOLA WFB, GALLERIA TR, GRANATA TR, HARMONY UX, HARMONY WFB, HERCULES TR, LUCIDO WFB, LUMINA WFB, MAESTRO TR, MASTER TR, NAMIBIA UX, NEPTUNUS UX, OPTIMA SDE NEW TR, PARMA WFB, PERUGIA UX, PROGRESSA PB (=PG+productname PB), PROGRESSA TR (=PG+productname TR), PROGRESSA UX (=PG+productname UX), PROJECTA TR (=PJ+productname TR), PROJECTA UX (=PJ+productname UX), PROMENADE PB (=PM+productname PB), PROMENADE TR (=PM+productname TR), PROMENADE UX (=PM+productname UX), PROSPECTA TR (=PP+productname TR), PROSPECTA UX (=PP+productname UX), PRECIOSA WFB, PROMINENT TR, PROVIDER TR (=PV+productname TR), PROVIDER UX (=PV+productname UX), QUARTIER TR, QUARTZ NEW TR, RIVOLI TR, ROCCA TR, ROCKET TR, ROSSINI TR, ROXANE TR, ROXANE UX, RIVELLO TR (=RV+productname TR – Love Vintage Collection), SAN MARINO WFB, SATINO CASANOVA WFB, SATINO DOLCE WFB, SATINO ROMANTICA WFB, SATINO ROMEO WFB, SATINO ROSARIO WFB, SATINO ROYALE WFB, SATINO ROYCE WFB, SERENO UX, SIERRA UX, SIRIO TR, SONOS UX, SPLENDID TR, SPONTINI TR, SUBLIMO UX, TOSCANA TR, TWEED TR

Wall-to-wall-carpet group "Polyamid/Polypropylen"

CAPE TOWN WFB, CORAL UX, DESERT TWIST DELUXE WFB, DURBAN WFB, FORUM UX, RADIUS UX, ROBUST UX, STAR QUEST WFB, STAR TR FR, STAR UX, TESSINO UX, TESSUTO UX, TIGRA UX

Wall-to-wall-carpet group "Polypropylen"

ACE TF, AIM HIGH TF, ANTIGUA UX, BRAZIL TF, CADENCE TF, CASABLANCA TR, CASABLANCA UX, CASADESIGN UX, CASADESIGN WFB, CHIANTI TF, DESERT ROCK WFB, EAGLE TF, EUPHORIA WFB, GALA DESIGN CABLE TR, GALA DESIGN CABLE UX, GALA DESIGN SUPER TR, GALA DESIGN SUPER UX, GALA EDITION UX, GALA STRIPES TR, GALA STRIPES UX, GALA TR, GALA UX, GOAL TF, GOLD FIELDS TF, GRAND CRU WFB, INVERNESS TF, JAMAICA TF, KOMPAKT TR, LINUS WFB, LUCKY TWIST TF, LUNA TF, MAGNUM WFB, MONTE CRISTO TR, MOON SHADOW TF, NATURE, NATURE DESIGN, NEW BAHIA UX, NEW HEATHER TWIST TF, NEW HEATHER TWIST TR, NEW SCORPIO TF, OPUS TF, PASSAT TF, PRIMA TF, PRIMA TR, PRISMA NEW TF, PURE, RAPID TR, RIO DESIGN UX, RUSTIC TF, SENSIT HEATHERS TR, SENSIT SUPREME TR, SENSIT TWIST TR, SERENITY TF, STAINSAFE MOORLAND STRIPES TF, STAINSAFE MOORLAND STRIPES TR, STAINSAFE MOORLAND TWIST TF, STAINSAFE MOORLAND TWIST TR, STAINSAFE SHEPHERD HEATHERS TR, STAINSAFE SHEPHERD TWIST TR, STAINSAFE WOODLANDS UX, STORMOND TWIST TF, STRIKE TF, SUPERNOVA TF, SUPERSTAR TF, SUPERSTAR TR, TAMPA UX, TIMELESS TR, TRINITY TF, TYNEDALE TWIST TR, UTOPA WFB, VERSAILLES TR, VERSAILLES UX, WEAVE DECO TF, WEAVE DESIGN TF, WEAVE TEC TF, WONDERWEAVE TR, WONDERWEAVE UX

Wall-to-wall-carpet group "Sorona"

BEAUFORT WFB, DA VINCI WFB, EDISON WFB, HERON WFB, NOBEL WFB