
PRODUCT SHEET

TECHNICAL FLOORS · RAISED ACCESS FLOOR

Sulfate de calcium

CBI · SC30V

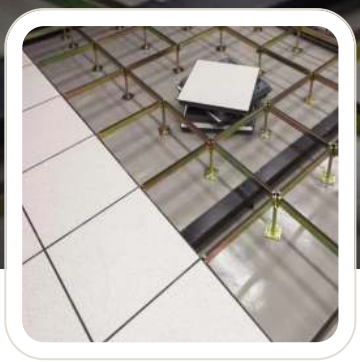

FAMILY
Raised access floor

BRAND
CBI

THICKNESS
30.5mm

FORMAT
Tile

REFERENCE
SC30V

A calcium sulphate raised access floor is a type of raised floor used mainly in offices, data centres and industrial environments requiring easy passage of cables, fluids and technical equipment under the floor. Applications Offices and open spaces Data centres and computer rooms Control rooms and laboratories Spaces requiring increased sound insulation

SPECIFICATIONS

- Modular structure: Made up of removable tiles laid on a steel or aluminium structure, allowing quick access to the installations below
- Various materials: Calcium sulphate tiles
- Adjustable height: The structure allows the height to be adjusted according to the volume of cabling and equipment required
- Cable and fluid management: Provides a dedicated space for organising and protecting electrical cables, networks, air conditioning, etc.
- Safety and strength: Supports heavy loads and can include antistatic, fire-retardant or acoustic properties as required
- Easy maintenance and scalability: Quick access to installations for maintenance and modifications

Technical specifications, CBI data sheet

Format	600 × 600 mm
Thickness	30.5 mm
Panel weight	14.5 kg
Core	High-density calcium sulphate
Core density	1,300 kg/m³
Bottom covering	Galvanised steel tray 0.5 mm
Edge	ABS 0,5 mm
Top covering	Bare, aluminium, HPL, PVC, linoleum or rubber, as required
Reaction to fire (EN 13501-1)	A1, non-combustible
Fire resistance (EN 13501-2)	REI 30
Airborne sound insulation	Dn,f,w 54 dB
Impact sound	Ln,f,w 41 dB
Walking sound	ΔLw 31 dB
Load at 2.5 mm deflection	4.7 kN
Ultimate load	9.7 kN
Load class EN 12825	4
Life expectancy	25 years
Manufacturer warranty	24 months

Manufacturer documents

- Fiche technique CBI SC30V (EN)
- Document fabricant (FR)
- Document fabricant (MULTI)

Advice, quotes, supply and installation
Showroom: Aïssat Idir, Petit Staouéli road, Chéraga 16014, Algiers
contact@odecor-dz.com
+213 770 52 41 12
Sales department **+213 550 28 23 39**

Photos, documents and quote
Scan to open the online page

Characteristics come from the manufacturer's documentation; they are indicative and may change. Document issued on 01/11/2026. · https://odecor-dz.com/en/produits/plancher-technique/sulfate-de-calcium/