PRODUCT SHEET

WALLS AND CEILINGS · SUSPENDED CEILING

AMF TOPIQ® Prime 15

Knauf · rock wool



FAMILY **Suspended ceiling**	BRAND **Knauf**
COLLECTION **rock wool**	THICKNESS **15mm**

AMF TOPIQ® Prime is a very lightweight rock wool tile offering a modern, clean surface

SPECIFICATIONS

Performance specifications

- EN ISO 354 αw= 0.95 in accordance with EN ISO 11654 - Class A NRC = 0.90 in accordance with ASTM C 423
- EN ISO 10848-2 Dn,f,w= 24dB in accordance with EN ISO 717-1
- EN ISO 10140-2 Rw= 13dB in accordance with EN ISO 717-1
- Euroclass A1 in accordance with EN 13501-1 RUS KM2 (G1,V1,D1,T1) in accordance with 123-FZ

Manufacturer documents

- Fiche technique AMF TOPIQ Prime (FR)
- Déclaration de performance TOPIQ Prime (FR)

Advice, quotes, supply and installation

Showroom: Aïssat Idir, Petit Staouéli road, Chéraga 16014, Algiers

contact@odecor-dz.com

+213 770 52 41 12

Sales department **+213 550 28 23 39**

Photos, documents and quote
Scan to open the online page


Characteristics come from the manufacturer's documentation; they are indicative and may change. Document issued on 31/10/2026. · https://odecor-dz.com/en/produits/faux-plafond/amf-topiq-prime-15/

PRODUCT SHEET

WALLS AND CEILINGS · SUSPENDED CEILING

AMF Thermatex STAR

Knauf · mineral wool

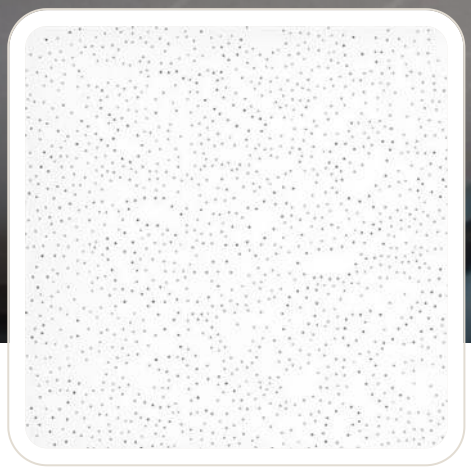

FAMILY **Suspended ceiling**	BRAND **Knauf**
COLLECTION **mineral wool**	THICKNESS **15mm**

> AMF THERMATEX® Star is a ceiling tile with fine irregular perforation on a smooth surface. Its aesthetics allow it to blend perfectly into modern architecture

SPECIFICATIONS

Performance specifications

- EN ISO 354 αw= 0.60 in accordance with EN ISO 11654 - Class C NRC=0.060 in accordance with ASTM C 423
- EN ISO 10848-2 Dn,f,w= 34dB in accordance with EN ISO 717-1
- EN ISO 10140-2 Rw= 21dB in accordance with EN ISO 717-1
- Euroclass A2-s1,d0 in accordance with EN 13501-1 RUS KM1 (G1,V1,D1,T1) in accordance with 123-FZ

Manufacturer documents

- Fiche technique AMF Thermatex Star (FR)

Advice, quotes, supply and installation

Showroom: Aïssat Idir, Petit Staouéli road, Chéraga 16014, Algiers

contact@odecor-dz.com

+213 770 52 41 12

Sales department **+213 550 28 23 39**

Photos, documents and quote
Scan to open the online page

Characteristics come from the manufacturer's documentation; they are indicative and may change. Document issued on 31/10/2026. · https://odecor-dz.com/en/produits/faux-plafond/amf-thermatex-star/

PRODUCT SHEET

WALLS AND CEILINGS · SUSPENDED CEILING

Thermatex Feinfresko

Knauf · mineral wool



FAMILY **Suspended ceiling**	BRAND **Knauf**
COLLECTION **mineral wool**	THICKNESS **15mm**

AMF THERMATEX® Feinfresko is a 15 mm mineral acoustic ceiling tile, available in Board and Tegular 24 finishes. With its textured surface, it offers good Class C sound absorption performance and is accredited Eurofins Indoor Air Comfort® GOLD. This makes AMF THERMATEX® Feinfresko a sensible choice for retail outlets, offices and production environments. AMF THERMATEX® Feinfresko is made of certified bio-soluble mineral wool and has an Environmental Product Declaration (EPD)

SPECIFICATIONS

Performance specifications

Good sound absorption (0.60(H) αw and 0.60 NRC)

- Excellent reaction to fire (A2-s1, d0)
- Exceptional air permeability (PM1 (≤ 30 m^3/hm^2))
- Ideal for retail outlets, offices and production environments

Manufacturer documents

- Fiche technique AMF Thermatex Feinfresko (FR)
- Déclaration de performance Thermatex Feinfresko (FR)

Advice, quotes, supply and installation

Showroom: Aïssat Idir, Petit Staouéli road, Chéraga 16014, Algiers

contact@odecor-dz.com

+213 770 52 41 12

Sales department +213 550 28 23 39

Photos, documents and quote
Scan to open the online page

Characteristics come from the manufacturer's documentation; they are indicative and may change. Document issued on 31/10/2026. · https://odecor-dz.com/en/produits/faux-plafond/thermatex-feinfresko/

PRODUCT SHEET

WALLS AND CEILINGS · SUSPENDED CEILING

Rockfon Artic®

Rockfon · rock wool



FAMILY **Suspended ceiling**	BRAND **Rockfon**
COLLECTION **rock wool**	THICKNESS **20mm**

Optimal sound absorption Basic range for exposed and semi-exposed frameworks Easy maintenance with a vacuum cleaner Rock wool panel Visible face: tissue painted white (smooth finish) Back face: backing tissue

SPECIFICATIONS

Performance specifications

– Versatile and suitable for many applications – Optimal sound absorption – Basic range for exposed and semi-exposed frameworks – Easy maintenance with a vacuum cleaner

Manufacturer documents

- Fiche technique Rockfon Artic (FR)

Advice, quotes, supply and installation

Showroom: Aïssat Idir, Petit Staouéli road, Chéraga 16014, Algiers

contact@odecor-dz.com

+213 770 52 41 12

Sales department +213 550 28 23 39

Photos, documents and quote
Scan to open the online page

Characteristics come from the manufacturer's documentation; they are indicative and may change. Document issued on 31/10/2026. · https://odecor-dz.com/en/produits/faux-plafond/rockfon-artic/

PRODUCT SHEET

WALLS AND CEILINGS · SUSPENDED CEILING

Rockfon Blanka®

Rockfon · rock wool



FAMILY **Suspended ceiling**	BRAND **Rockfon**
COLLECTION **rock wool**	THICKNESS **15mm**

Multidirectional and antistatic, it is quick to install and resists handling and dust. Perfect appearance durability over time. Rock wool panel Visible face: extra-white painted tissue (smooth, matt finish) Back face: backing tissue Painted edges (except A edges)

SPECIFICATIONS

Performance specifications

– Its extra-white, matt surface improves the reflection and diffusion of light from the ceiling. – Multidirectional and antistatic, it is quick to install and resists handling and dust. – Perfect appearance durability over time

Manufacturer documents

- Fiche technique Rockfon Blanka (FR)

Advice, quotes, supply and installation

Showroom: Aïssat Idir, Petit Staouéli road, Chéraga 16014, Algiers

contact@odecor-dz.com

+213 770 52 41 12

Sales department +213 550 28 23 39

Photos, documents and quote
Scan to open the online page

Characteristics come from the manufacturer's documentation; they are indicative and may change. Document issued on 31/10/2026. · https://odecor-dz.com/en/produits/faux-plafond/rockfon-blanka/

PRODUCT SHEET

WALLS AND CEILINGS · SUSPENDED CEILING

Rockfon CleanSpace® Essential

Rockfon · rock wool



FAMILY **Suspended ceiling**	BRAND **Rockfon**
COLLECTION **rock wool**	THICKNESS **15mm**

Rockfon CleanSpace Essential has a white, textured surface suitable for gentle cleaning A-edge tile available in standard dimensions High sound absorption (Class A) and high fire protection (Class A1) The surface can be cleaned with a damp cloth or a vacuum cleaner Low particle emission: ISO Class 4 Moisture resistance up to 100% Rock wool tile Visible face: tissue painted white with a textured appearance Back face: backing tissue Painted edge 20 mm, unpainted edge 12mm

SPECIFICATIONS

Performance specifications

– Rockfon CleanSpace Essential has a white, textured surface, suitable for gentle cleaning – A-edge tile available in standard dimensions – High sound absorption (Class A) and high fire protection (Class A1) – The surface can be cleaned with a damp cloth or a vacuum cleaner –

Low particle emission: ISO Class 4 – Moisture resistance up to 100 %

Manufacturer documents

- Fiche technique Rockfon CleanSpace Essential (FR)

Advice, quotes, supply and installation

Showroom: Aïssat Idir, Petit Staouéli road, Chéraga 16014, Algiers

contact@odecor-dz.com

+213 770 52 41 12

Sales department +213 550 28 23 39

Photos, documents and quote
Scan to open the online page

Characteristics come from the manufacturer's documentation; they are indicative and may change. Document issued on 31/10/2026. · https://odecor-dz.com/en/produits/faux-plafond/rockfon-cleanspace-essential/

PRODUCT SHEET

WALLS AND CEILINGS · SUSPENDED CEILING

Rockfon Pacific®

Rockfon · rock wool



FAMILY **Suspended ceiling**	BRAND **Rockfon**
COLLECTION **rock wool**	THICKNESS **12mm**

> Class A sound absorption, reduced thickness of 12 mm. Basic range of formats in exposed and semi-exposed grid variants. Easy to clean with a vacuum cleaner. Rock wool ceiling panel Visible face: mineral tissue painted in shaded white Back face: natural mineral tissue

SPECIFICATIONS

Performance specifications

– Rockfon CleanSpace Essential has a white, textured surface, suitable for gentle cleaning – A-edge tile available in standard dimensions – High sound absorption (Class A) and high fire protection (Class A1) – The surface can be cleaned with a damp cloth or a vacuum cleaner – Low particle emission: ISO Class 4 – Moisture resistance up to 100 %

Manufacturer documents

- Fiche technique Rockfon Pacific (FR)

Advice, quotes, supply and installation

Showroom: Aïssat Idir, Petit Staouéli road, Chéraga 16014, Algiers

contact@odecor-dz.com

+213 770 52 41 12

Sales department **+213 550 28 23 39**

Photos, documents and quote
Scan to open the online page

Characteristics come from the manufacturer's documentation; they are indicative and may change. Document issued on 31/10/2026. · https://odecor-dz.com/en/produits/faux-plafond/rockfon-pacific/